




# LUNA OUTDOOR BELL PANEL

Touch panel with Room Number Display

Data Sheet Rev 3.2

Model: LUNA-3S-Bell

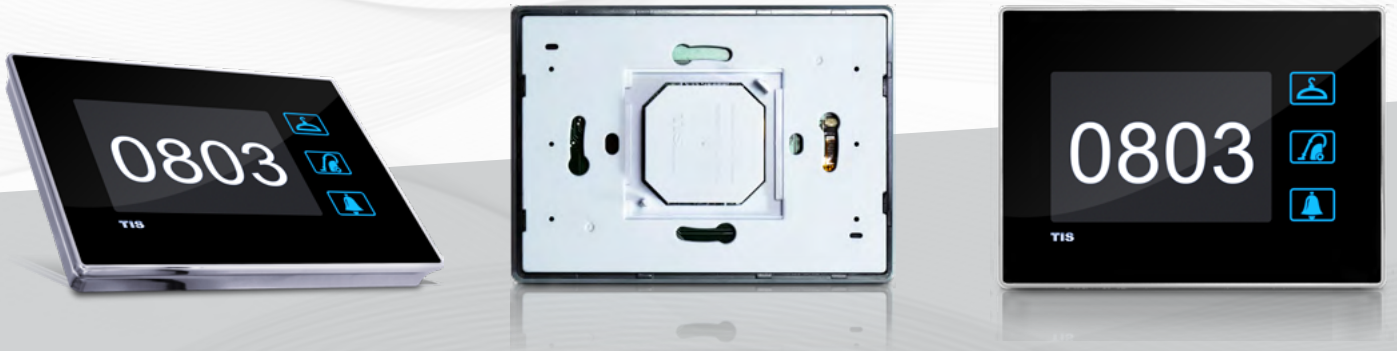

## OVERVIEW

This product is a BUS-operated wall panel with room number and services display and a touch bell, designed for maximum convenience and efficiency in hospitality facilities.

### KEY BENEFITS

- ➕ Upgraded hospitality convenience
- ➕ Advanced guest room management
- ➕ Easy installation & maintenance
- ➕ Applicable in hotels, resorts, clubs, etc.

### KEY FEATURES

- ★ Room number & services display
- ★ Touch button for bell
- ★ Customizable RGB backlit
- ★ Nice design with high surface sensitivity



# LUNA OUTDOOR BELL PANEL
















Touch panel with Room Number Display


Model: LUNA-3S-Bell

TIS



## PRODUCT SPECIFICATIONS

	<b>Touch</b>	Active area Touch Type	1 button for bell Capacitive
	<b>Input</b>	Using Panel Addition	4 Digital Inputs
	<b>Output</b>	Low current relay	1 Relay Output 2A/12V
	<b>TIS Bus</b>	Number of devices on 1 line Bus voltage Current consumption	Max. 64 12-32 V DC <25 mA / 24 V DC
	<b>Protection</b>		Reverse Polarity Protection ESD Protection
	<b>Reaction time</b>		approx. 20ms
	<b>Mounting</b>	Wall mount	2 screws on the back box (UK, EU, US)
	<b>Connection terminal</b>	Data	2 male pins connectors to fit in panel addition
	<b>Operation</b>	touch buttons Backlight TIS bus Upgrading	1 touch button 3 RGB indicators + Room number white LEDs TIS Protocol messages and commands By Rs485 upgrading kit
	<b>Functions</b>	Bell Press	Touch Button
	<b>Weight</b>	Without packaging	120g
	<b>Dimensions</b>	Width x length x height	94mm x 129mm x 13mm
	<b>Housing</b>	Materials Casing color Internal Parts color IP rating	Fireproof PC / Glass in front Silver plating frame. Glass black Black & White IP 50
	<b>Temperature range</b>	Operation Storage Transport	-10...60°C -20...50°C -25...75°C
	<b>Air humidity</b>		<80% non-condensing

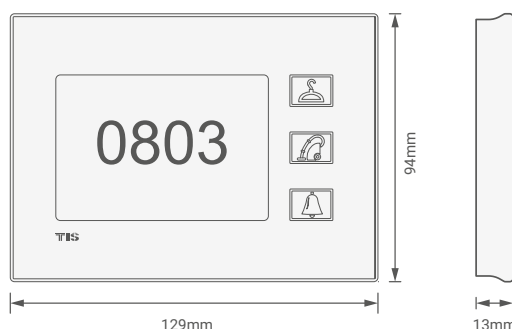

TIS

Copyright © 2022 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL .  
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED  
SA , AUSTRALIA

TIS CONTROL LIMITED  
Wanchai, Hong Kong

www.tiscontrol.com