TIS RADAR SENOR

Model: OS-MMV-IC



PRODUCT SPECIFICATIONS	
Power Source	24V DC
Ambient Light	10LUX/30LUX/100LUX/DAY 24H(Adjustable)
Time Delay	10sec/1min/5min/15min(adjustable)
Rated Load	Max. 2000W 1000W LED
Detection Range	360° Ceiling/180°Wall
Detection Distance	Max 3-4m(radius) movementsignal such as hand moving, shake head.2-3m(radius)breathesignal.
Working Temperature	-20°C ~ +40°C
Working Humidity	< 93%RH
Power Consumption	Approx 0.90W
Installation Height	2.2-4m
Dimensions	98mm x 98mm x 32mm

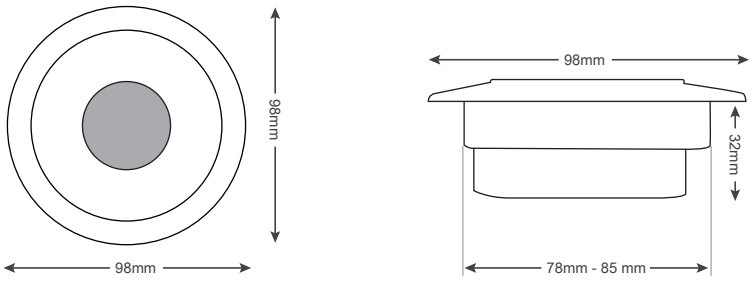

OS-MMV-IC

Copyright © 2024 TIS, All Rights Reserved
TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong