



TIS CLICK THERMOSTAT PANEL

Modular Wall Thermostat

Data Sheet Rev 3.1

Model: TIS-CLK-AC-XXX



OVERVIEW

The Click AC is a stylish and versatile air conditioning controller with a modular design, available in black, white, or gray to seamlessly match your space. Equipped with a 1.5-inch LCD screen, it offers clear and intuitive display of settings. The device features four functional buttons, allowing easy and efficient control of your air conditioning system. Its modern design and user-friendly interface make it an ideal solution for managing indoor climate with simplicity and style.

KEY BENEFITS

- + Efficient Air Conditioning Control
- + Modular Installation for Flexibility
- + Clear LCD Screen Display
- + User-Friendly, Available in 4 Colors

KEY FEATURES

- ★ Wall-Mount Panel with 1.5" LCD Screen
- ★ 4 AC Function Buttons
- ★ Integrated Temperature Sensor
- ★ Compatible with TIS-BUS Protocol



TIS CLICK THERMOSTAT PANEL














Modular Wall Thermostat

Model: TIS-CLK-AC-XXX

TIS



PRODUCT SPECIFICATIONS

	Input	Temperature Sensor	0-100C
	TIS Bus	Number of devices on 1 line Bus voltage Current consumption	Max. 64 12-32 V DC <50 mA / 24 V DC
	Protection	Protection	Reverse Polarity Protection ESD Protection
	Reaction time		approx. 20ms
	Mounting	Wall mount	by 2 screws on the back box (UK, Europe, US)
	Connection terminal	Data	2 male pins connectors to fit in panel addition
	Operating and display elements	Display 4 push buttons TIS bus	1.5 inch LCD Screen 4 push buttons for AC fincation TIS Protocol messages and commands
	Functions	POWER Button Arrow UP / Down Fan/Mode	AC ON-OFF Change Temperature / Change Fan speed, Cool heat fan mode
	Weight	Without packaging	180g
	Dimensions	Width x length x height	51.7mmx51.7mmx32.5mm
	Housing	Materials Internal Parts color IP rating	PC anti fire Black, Gray, White, Or Gold IP 50
	Temperature range	Operation Storage Transport	-10...60°C -20...50°C -25...75°C
	Air humidity		<80% non-condensing



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong


www.tiscontrol.com

TIS CLICK THERMOSTAT PANEL

Modular Wall Thermostat



Model: TIS-CLK-AC-XXX

TIS

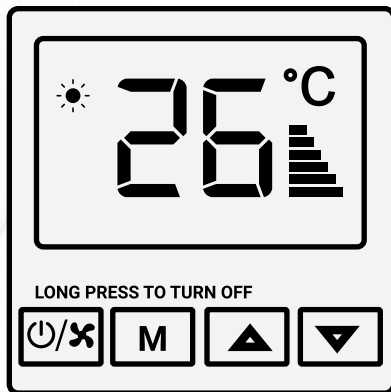

51.7mm

51.7mm

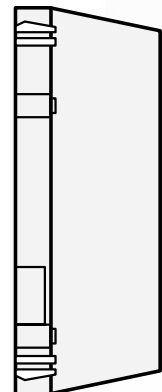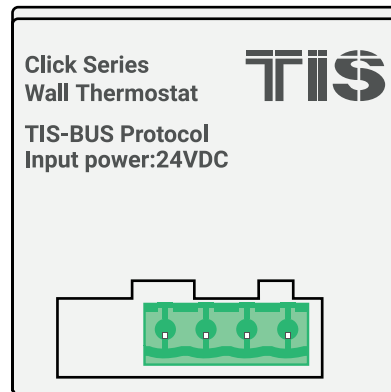

32.5mm



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong

www.tiscontrol.com