



TIS CLICK UNIVERSAL SOCKET

Modular Wall Socket

Data Sheet Rev 3.1

Model: TIS-CLK-PLG-UNV



OVERVIEW


The TIS Click Universal Socket is a versatile solution designed to accommodate multiple plug types, making it ideal for modern homes and hotels that host international guests. Its sleek design blends seamlessly into any interior.

KEY BENEFITS

- ✚ Supports various international plug types, ensuring easy power access for travelers.
- ✚ Modular frame options in black, gray, and gold elevate room ambiance.
- ✚ Built with PC Anti-Fire material for long-lasting and secure usage.

KEY FEATURES

- ★ Supports multiple plug standards, including Type A, C, G, and more.
- ★ Durable construction for heavy, continuous use.
- ★ Seamlessly integrates with TIS Click series modular systems for customized installations.



TIS CLICK UNIVERSAL SOCKET

Modular Wall Socket

Model: TIS-CLK-PLG-UNV

TIS










Things to note:



- Installation or removal must be performed by a professional electrician;
- Do not operate with wet hands to avoid electric shock;
- Do not use in short circuit or overload condition;
- It is strictly forbidden to install with power on;

PRODUCT SPECIFICATIONS

	Input	Input voltage	AC 220V
		Wiring method	220V strong electricity
		Rated voltage	250 V
		Rated current	10 A
		Platform name	F platform
		Switch category	Strong electrical socket
	Functions	USB input voltage	<input type="radio"/>
		USB output voltage	<input type="radio"/>
		USB output current	<input type="radio"/>
		Zero live line	<input checked="" type="radio"/>
		Relay	<input type="radio"/>
		Variable backlight function	<input type="radio"/>
	Mounting	Installation method	National standard 86 installation base box
		Buried depth	≥45mm
	Features	CNC hemming, multiple colors available If users need power, a USB port can also be provided to charge electronic products.	
	Weight	Without packaging	125g
	Dimensions	Width x length x height	86mmx86mmx9mm(without base) 51.5mmx51.5mmx32.5mm(Part)
		Surface material	Aluminum plate, stainless steel, zinc alloy
	Housing	Surface treatment	Aluminum oxide brushed, sprayed frosted, electroplated zinc alloy
		IP rating	IP 50
		Can be made into one piece	Single, double, triple, quadruple
		Outer frame bracket	J steel frame with bracket (horizontal and vertical installation), Z plastic narrow frame, K plastic wide frame, L aluminum frame, X zinc alloy frame



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA


TIS CONTROL LIMITED
Wanchai, Hong Kong

TIS CLICK UNIVERSAL SOCKET

Modular Wall Socket



Model: TIS-CLK-PLG-UNV

TIS

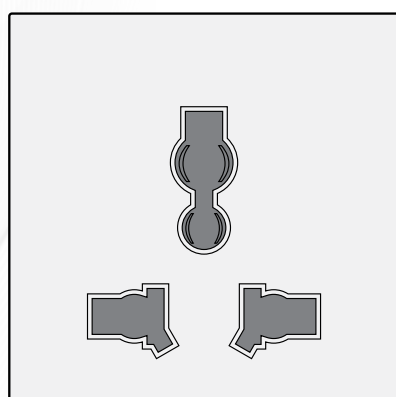

51.5mm

51.5mm

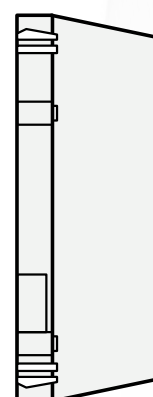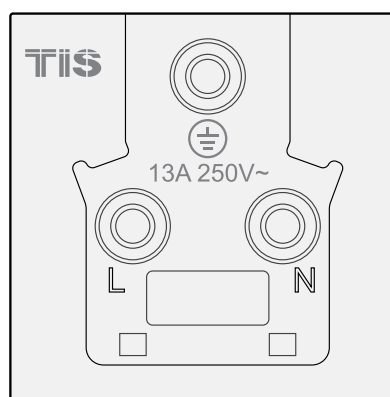

32.5mm



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong

www.tiscontrol.com