



DALI MASTER CONTROLLER

Din-rail DALI Actuator

Data Sheet Rev 3.2

Model: DALI-64



OVERVIEW

This product is a controller supporting 64 ballasts for scene control and grouped and individual lights control.

KEY BENEFITS

- + Compatibility with other TIS solutions
- + Improved flexibility & easy installation
- + Adjustable to various interior needs & likes
- + Ideal for large & industrial areas

KEY FEATURES

- ★ Gateway between TIS & DALI 2 protocols
- ★ Up to 64 DALI drivers support
- ★ Programmable for scenes & presets
- ★ Controllable via TIS App



DALI MASTER CONTROLLER



DIN-RAIL DALI ACTUATOR

Model: DALI-64



PRODUCT SPECIFICATIONS

	Ports	DALI	Standard DALI connection Max 64 units
	TIS Bus	Number of devices on 1 line Bus voltage Current consumption Protection	Max. 64 12-32 V DC <300 mA / 24 V DC Reverse polarity protection
	Reaction time		approx. 20ms
	Functions	DALI	64 programmable addresses 16 Groups 16 Scenes
	Mounting	Din rail Wall mount	Standard 35 mm din rail screw holder on the back of the module
	Connection terminal	Load and Power Data / bus	Screw terminal 0,25...4mm ² Male & female connectors Link + screw Terminal
	Weight	Without packaging	210g
	Dimensions	Width × length × height	76mm × 73mm × 90mm
	Housing	Materials Casing color IP rating	Fireproof ABS Black IP 20
	Temperature range	Operation Storage Transport	-30...60°C -20...60°C -30...75°C
	Air humidity		<85% non-condensing

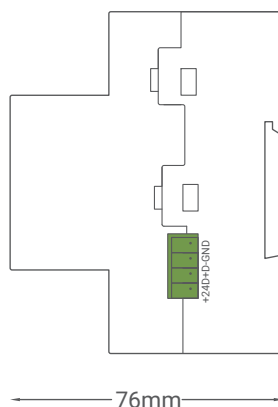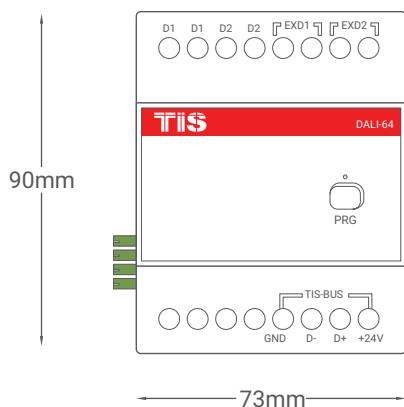

Copyright © 2024 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong