



DMX MASTER CONTROLLER

Din-rail DMX Actuator

Data Sheet Rev 3.2

Model: TIS-DMX-48



OVERVIEW

This product is a controller supporting 48 ballasts for scene control and grouped and individual lights control using the DMX standard.

KEY BENEFITS

- + Compatibility with other TIS solutions
- + Improved flexibility & easy installation
- + Adjustable to various interior needs & likes
- + Ideal for residential & industrial areas

KEY FEATURES

- ★ Gateway between TIS & DMX 512 standard
- ★ Up to 48 lighting channels support
- ★ Programmable for scenes & presets
- ★ Controllable via TIS App



DMX MASTER CONTROLLER












Din-rail DMX Actuator



Model: TIS-DMX-48

TIS



PRODUCT SPECIFICATIONS

	Ports	DMX	Standard DMX connection
	TIS Bus	Number of devices on 1 line Bus voltage Current consumption Protection	Max. 64 12-32 V DC <25 mA / 24 V DC Reverse polarity protection
	Reaction time		approx. 20ms
	Functions	DMX	Numbers of areas 24 12 Scenes 16 Sequence
	Mounting	Din rail Wall mount	Standard 35 mm din rail screw holder on the back of the module
	Connection terminal	Load and Power Data / bus	Screw terminal 0,25...4mm ² Male & female connectors Link + screw Terminal
	Weight	Without packaging	210g
	Dimensions	Width x length x height	76mm x 73mm x 90mm
	Housing	Materials Casing color IP rating	Fireproof ABS Black IP 20
	Temperature range	Operation Storage Transport	-30...60°C -20...60°C -30...75°C
	Air humidity		<85% non-condensing

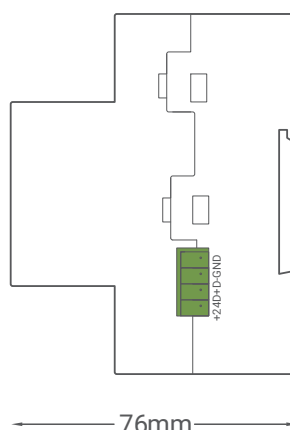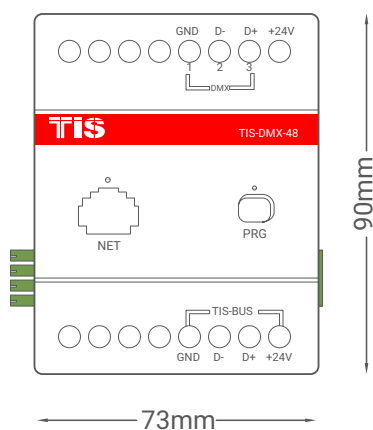

TIS

Copyright © 2024 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA, AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong

www.tiscontrol.com