




# TIS DOOR PHONE

TIS Smart Outdoor Door Phone

Data Sheet Rev 3.2

Model: TIS-INT-5PB-61M

TIS-INT-2PB-61M

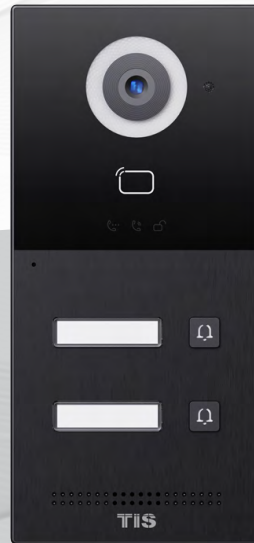

## OVERVIEW

The INT-5PB-61M (or INT-2PB-61M) is a smart multi-button outdoor station for apartment use, featuring a 2MP camera, two-way audio, IC/ID card access, and five individual call buttons. It integrates with smart home systems for secure, efficient entry management.

### KEY BENEFITS

- + Ideal for apartments and multi-tenant buildings
- + Secure, contactless access for residents
- + Day/night clarity for effective monitoring
- + Seamless integration with smart systems
- + Reliable under harsh outdoor conditions
- + Remote monitoring from anywhere with TIS Smart Home App

### KEY FEATURES

- ★ 2MP WDR camera with LED night vision
- ★ 2 or 5 call buttons for multi-unit access
- ★ IC & ID card access (up to 60,000 cards)
- ★ 2 relay outputs for dual door locks
- ★ Power: PoE or DC 12V/2A
- ★ RS485 & Wiegand supported



BARCODE (UPC-A)



6 06795 20981 1

BARCODE (UPC-A)



6 06795 20980 4

# TIS DOOR PHONE

TIS Smart Outdoor Door Phone

Model: TIS-INT-5PB-61M

TIS-INT-2PB-61M



## PRODUCT SPECIFICATIONS

	<b>Camera</b>	Image Sensor	2MP CMOS with WDR
		Video Resolution	1280 × 720 (HD)
		Viewing Angle	110° (H), 60° (V), 125° (D)
		Frame Rate	25 fps
		Supplement Light	White LED (Night Vision)
		Video Compression	H.264
	<b>Access Control</b>	Card Reader Type	IC (13.56 MHz) & ID (125 kHz)
		Card Reading Distance	3 cm
		Tamper Detection	Supported
	<b>Audio</b>	Microphone & Speaker	Built-in with Echo Cancellation
		Two-Way Audio	Supported via SIP and App
		Audio Codec	G.711
	<b>Network</b>	Ethernet	1 × RJ45 (10/100 Mbps, self-adaptive)
		Protocols Supported	SIP v2.0, UDP, TCP, RTP, RTSP, HTTP, DHCP, etc.
	<b>Power &amp; Ports</b>	Power Supply	PoE (IEEE 802.3af) or 12V DC (2A)
		Standby / Rated Power	1.5 W / 3.5 W
		Relay Out	2
		RS485 Port	1
		Wiegand Port	Supported
		Input	2
	<b>Mounting</b>	Installation Method	Wall-Mount (flat surface)
	<b>Dimensions</b>	Dimensions (W × H × D)	188 × 88 × 34 mm
	<b>Housing</b>	Materials	Aluminum + Tempered Glass
		Casing color	Black Gray
		IP rating	IP65 (Waterproof), IK06 (Vandal Resistant)
	<b>Temperature range</b>	Operation	-40°C to +55°C
		Storage	-40°C to +70°C
	<b>Operating Humidity</b>		10% to 90% (Non-Condensing)



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.  
All of the specification are subject to change without notice.

TIS Control Pty Ltd  
SA, Australia


TIS Control Ltd  
Wanchai, Hong Kong

# TIS DOOR PHONE

TIS Smart Outdoor Door Phone

Model: TIS-INT-5PB-61M

TIS-INT-2PB-61M

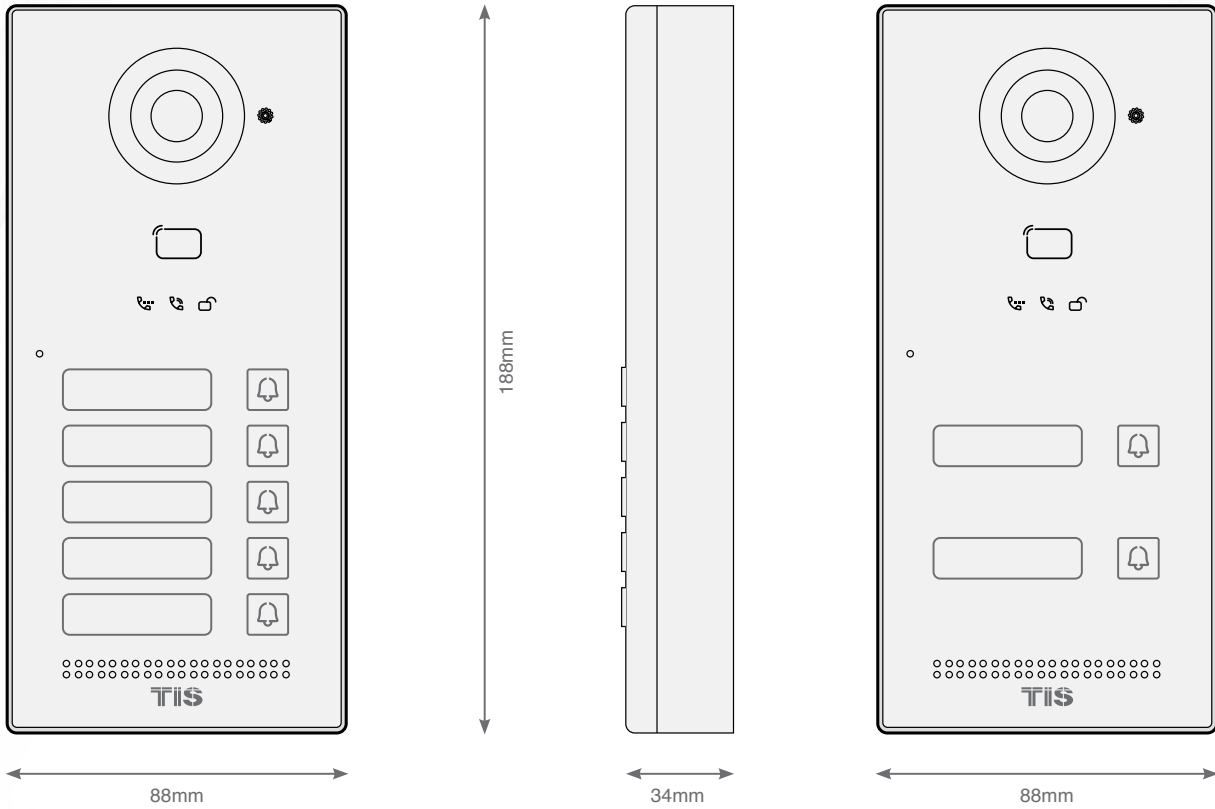

Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.  
All of the specification are subject to change without notice.

TIS Control Pty Ltd  
SA, Australia

TIS Control Ltd  
Wanchai, Hong Kong