





# TIS VENERA SERIES

Touch Wall Switch

Data Sheet Rev 3.2

Model: VEN-3S-3R-HC  
VEN-2S-2R-HC



## OVERVIEW

This product is a 2/3gang wall switch with touch buttons designed for lights and scene control. It offers customizable backlit color and covers for an easy combination with interior schemes.

### KEY BENEFITS

- Compatibility with other TIS solutions
- Improved energy efficiency
- Suitable for all types of back boxes
- Applicable in home, hotel & office rooms

### KEY FEATURES

- ★ Direct connection to WiFi network
- ★ Available in black and white
- ★ Delicate touch buttons with backlit
- ★ Programmable for scenes & presets
- ★ Controllable through TIS App




# TIS VENERA SERIES















## Touch Wall Switch

Model: VEN-3S-3R-HC, VEN-2S-2R-HC

TIS



### PRODUCT SPECIFICATIONS

	<b>Power supply</b>	Input Voltage	110-230 VAC 50/60 Hz
		Output power	3W / 12V
		Protection	Internal protection fuse
		Current consumption	10-30 mA / 12 V DC
	<b>Output</b>	Number of channels	2 / 3
		Nominal voltage	110 / 230 V AC 50/60 Hz
		Nominal current per channel	8 A / 230 VAC
	<b>Output switching current</b>	Max. switching current	10A/230 VAC resistive
			6A/230 VAC florescent
		Max. continues current	8A/230 VAC
		Max. switching voltage	277VAC / 30VDC
	<b>Output service life</b>	Mechanical endurance	> 10,000,000 OPS
	<b>Output switching times</b>	Operating time	8 mS (at nomi. Volt)
		Releasing time	5 mS (at nomi. Volt)
		Max. operating frequency	25 cycle/min
	<b>TIS AIR</b>	WIFI signal	2.4 GHz
		Protocol standard	802.11 b/g/n
	<b>Reaction time</b>		approx. 30ms
	<b>Mounting</b>	Wall mount	To US, EU, UK junction boxes
	<b>Operation</b>	Touch buttons	4 touch Capacitive Control Buttons
		Backlit	LED indicators
		TIS AIR	TIS protocol messages & commands
		Upgrading	Over WIFI connection
	<b>Weight</b>	Without packaging	20g
	<b>Dimensions</b>	Length x Width x Height	85mm x 42mm x 109mm
	<b>Housing</b>	Materials	Fireproof PC/ Glass in front
		Internal parts color	Black or White
		IP rating	IP 50
	<b>Temperature range</b>	Operation	-10...60°C
		Storage	-20...50°C
		Transport	-25...75°C
	<b>Air humidity</b>		<80% non-condensing



Copyright © 2022 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.  
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED  
SA, AUSTRALIA



TIS CONTROL LIMITED  
Wanchai, Hong Kong

# TIS VENERA SERIES

Touch Wall Switch


Model: VEN-3S-3R-HC, VEN-2S-2R-HC

TIS




85mm

109mm

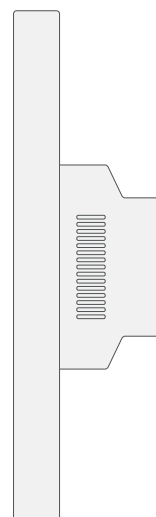


42mm



85mm

109mm

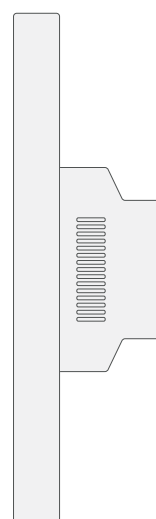

42mm



Copyright © 2022 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.  
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED  
SA , AUSTRALIA

TIS CONTROL LIMITED  
Wanchai, Hong Kong