TIS ZIGBEE GATEWAY

ZIGBEE HUB GATEWAY

Model: ZIG-WF-GTY



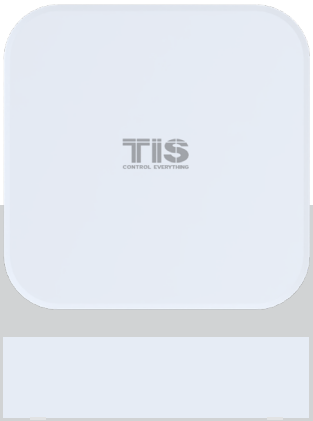

OVERVIEW

The ZigBee IP Hub is compatible with a full range of TIS ZigBee Devices include controllers, security & sensors, lighting, and more, let you to create a fully smart space without rewiring or renovations.

KEY BENEFITS

- Smart automation at a lower cost
- No drilling or rewiring needed
- Move and re-install effortlessly
- Works with TIS & third-party ZigBee devices

KEY FEATURES

- Support 128 ZigBee zones
- Compact design for easy installation
- Zigbee 3.0 protocol controller

Data Sheet Rev 4.1

TIS ZIGBEE GATEWAY

Zigbee Hub gateway

MODEL: ZIG-WF-GTY

PRODUCT SPECIFICATIONS

	Ports	Zigbee Wan RJ45 / LAN	Zigbee 3.0 TIS-BUS Ethernet UDP - TCP/IP connection
	Power	USB	Micro USB Port, 5V
	Reaction time	approx. 20ms	
	Function programmable options	Zigbee 3.0 Ethernet Rj45 Upgrading PRG button	Program 128 channel UDP TIS Protocol – TCP/IP TIS cloud By UDP ethernet port To rest IP address to 192.168.10.100 (default)
	Weight	Without packaging	85g
	Dimensions	Width × length × height	90mm × 90mm × 22mm
	Housing	Materials Casing color IP rating	ABS White IP 20
	Temperature range	Operation Storage Transport	-30...60°C -20...60°C -30...75°C
	Air humidity		<85% non-condensing

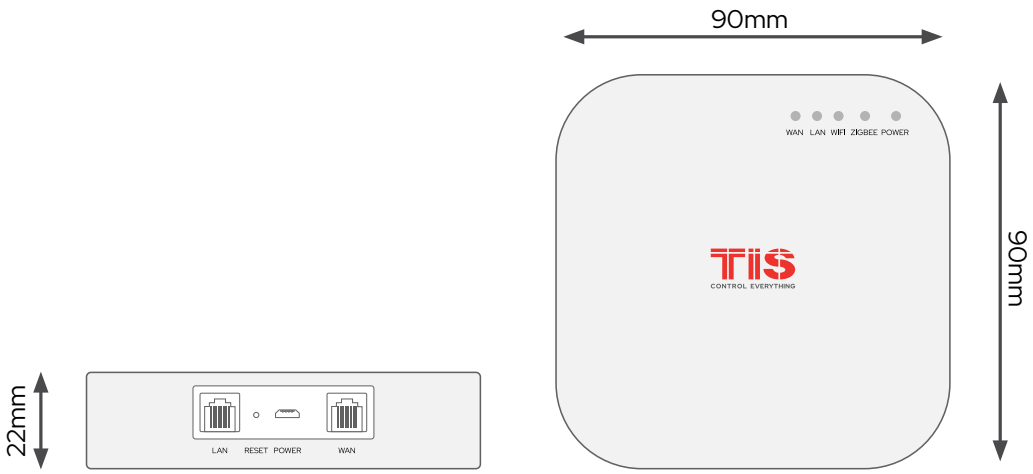

Copyright © 2026 TIS, All Rights Reserved
TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS Control Pty Ltd
SA, Australia

TIS Control Ltd
Wanchai, Hong Kong