

Card Power Switch with Service Indicators


Product Diagrams V 1.2

Model: IO-OUT-HOTEL-RF







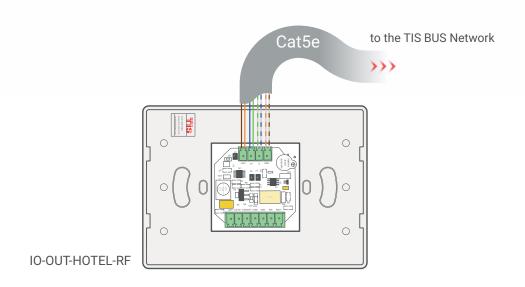

Cat5e connection

GND(white-orange)&(white-brown)

D-(white-green)&(white-blue)

D+(blue-green)

+24V(brown-orange)

▲ Figure 1: IO-OUT-HOTEL-RF Module's Bus Connection Color Coding

TIIS

Card Power Switch with Service Indicators
Model: IO-OUT-HOTEL-RF



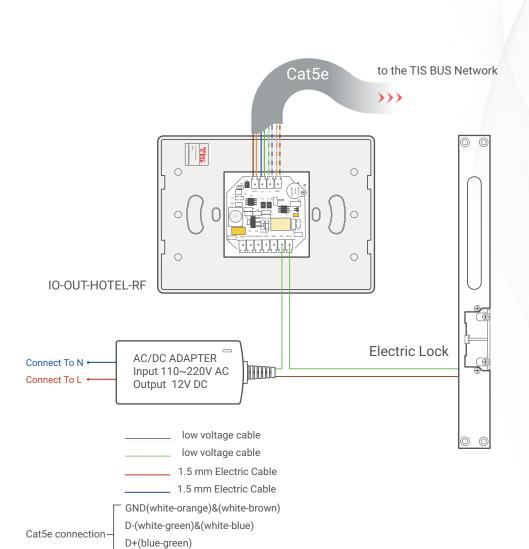


Figure 2: IO-OUT-HOTEL-RF & Electric Lock Connection Diagram




+24V(brown-orange)

Card Power Switch with Service Indicators Model: IO-OUT-HOTEL-RF







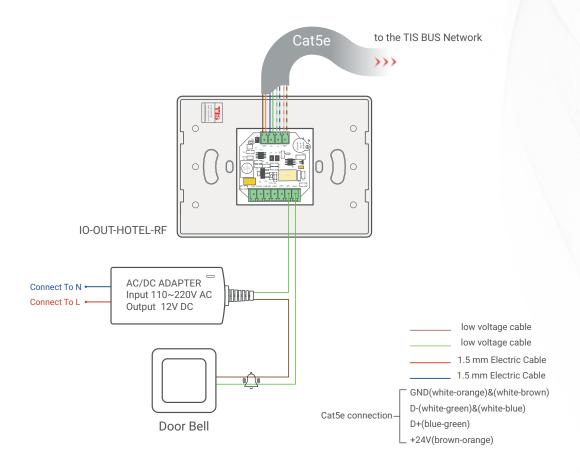


▲ Figure 3: IO-OUT-HOTEL-RF & Door Bell Unit Connection Diagram



7115

Card Power Switch with Service Indicators
Model: IO-OUT-HOTEL-RF



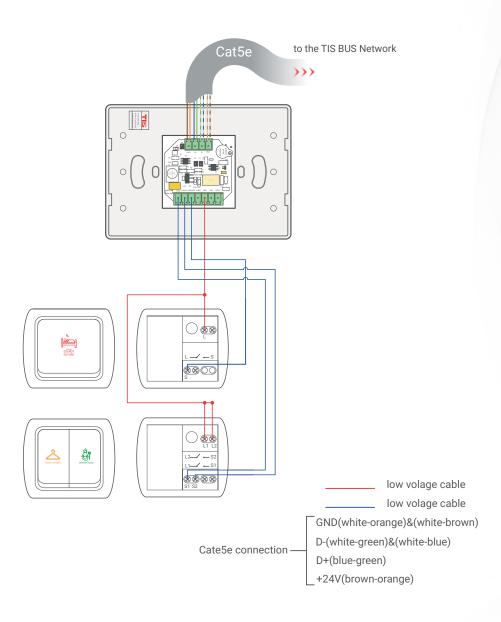

▲ Figure 4: IO-OUT-HOTEL-RF & Traditional Light Switch Connection Diagram



Card Power Switch with Service Indicators Model: IO-OUT-HOTEL-RF









▲ Figure 5: IO-OUT-HOTEL-RF Module's Dimensions

