

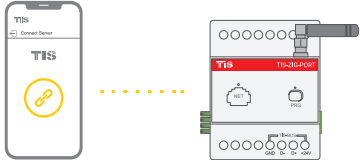












80 mm	60mm	60mm	60mm	60mm	60mm
	BASIC INFORMATION	WARNINGS & SAFETY INSTRUCTIONS	CONFIGURATION		
	 <p>This remote control easily fit perfectly in your hand, and pocket. This keychain remote comes with a fully configurable, automatic pin lock that effectively protects against accidental clicks or unauthorized use. The portable 4 button remote offers Arm Away, Arm Stay, Disarm, and Emergency Panic modes for an advanced security.</p>	<p>The following must be read, kept, and observed before installation:</p> <ul style="list-style-type: none"> The LED serves as a transmission status indicator. Do not use the product if a part is damaged or defective. Replace a damaged or defective product immediately. 	<p>1 Download the App Search for TIS Control & download the app</p>  <p>2 Set up your hub (if not already set in the application)</p> 	<p>3 Go to Settings, and enter the default username and password</p>  <p>4 Go to the TIS-BEE configuration button, and follow the instructions</p> 	<p>5 Add the Device In the TIS-Bee configuration, press Add Device. Then, follow the instructions to add the device using the 2 available methods</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>a. Scan QR Method</p> </div> <div style="text-align: center;">  <p>b. Search Method</p> </div> </div> <p>Select whichever method you prefer, and follow the instructions on the app</p>
	1	2	3	4	5

80 mm	60mm	60mm	60mm	60mm	60mm
	TECHNICAL SPECIFICATIONS	BATTERY REPLACEMENT	RESET TO FACTORY DEFAULT		TIS BEE User Manual Zigbee Key Fob
	 <p>Communication Protocol Zigbee® 3.0 Network</p> <p>Dimensions 48.8×35.5×11.8mm</p> <p>Battery type CR2032</p> <p>RF output power 7dBm max</p> <p>IP Rating IP41</p>	<p>1 Remove the battery cover of the device using a screwdriver</p>  <p>2 Replace the battery</p> 	<p>1 Press first button for 10 seconds, remote will go to pairing mode.</p> 	<p>Product specifications, size, shape, and prices are subject to change without notice, and actual product appearance may differ from that depicted on the packaging.</p> <p>TIS TIS CONTROL LIMITED</p> <p>RM 1502-p9 Easey Comm Bldg 253-261 Hennessy Rd Wanchai, Hong Kong www.tiscontrol.com</p> 	 <p>CE</p>
	6	7	8		

Please read the user manual carefully before operation